
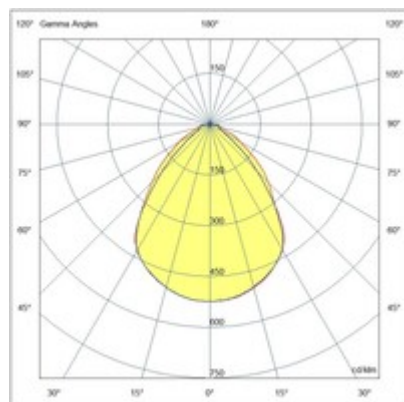


Skilos

Skilos recessed ceiling is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

Artikelnummer	6524-34-705
Typ	Einbauleuchte
Designer	S.T. Fabas Luce
EAN	8019282552765
Zolltarif	94054239
Farbe	Weiß
Material	Metall / Klar prismatic Diffusor
IP	IP65
IK	04
Isolierklasse	 CL1
Operating ambient temperature	-20°C +45°C
Jahre Garantie	5
Artikelmaße	600x600x103mm - 9.3kg
Verpackungsmaße	650x650x150mm - 10.6kg
Bestückung 1	
Bestückung	LED Eingebaut
LED Merkmale	SMD
Lumen der Lichtquelle	4222 lm
Lumen des Artikels	4485 lm
Farbtemperatur	naturweiss 4000 K
Diffusor	Prismatisch
Minimaler CRI	>90
UGR	<19
Energieklasse	 C
Elektrische Spezifikationen 1	
Eingangsspannung	220/240V AC 50/60Hz
Gesamtabsorbierte Leistung	25W
Treiber	Inklusiv
Leistungsfaktor	> 0.9
Steuerungssystem	DALI/Push/On-Off

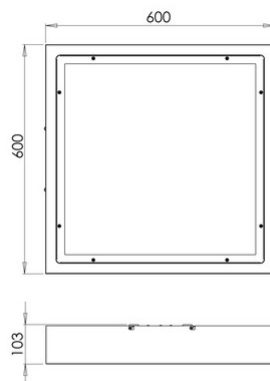

CE