
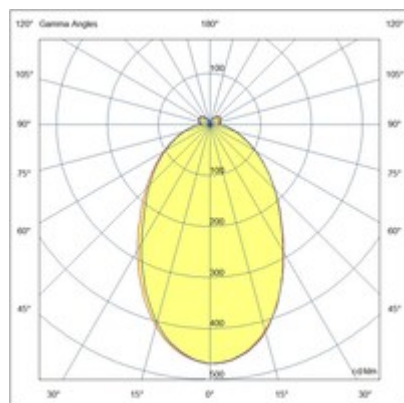



## Leo

Circular aluminium ring suspension with opal diffuser diameter 600 mm, available in black and white finishing. Available only in the 3000K version, white or black finishing. It has source emission of about 3780lm. Design and size make Leo an elegant decorative and furnishing element, its performance makes it very versatile. Leo adapts to all environments, even large ones. Perfect for reception (reception, cash desks, hall) and suitable for general lighting in shops, bars, restaurants and meeting rooms, also suitable for your home environment.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Artikelnummer</b>                 | <b>6993-12-966</b>                                                                       |
| <b>Typ</b>                           | Pendelleuchte                                                                            |
| <b>EAN</b>                           | 8019282553489                                                                            |
| <b>Zolltarif</b>                     | 94051190                                                                                 |
| <b>Farbe</b>                         | Schwarz                                                                                  |
| <b>Material</b>                      | Aluminium / Opalweiß Diffusor                                                            |
| <b>IP</b>                            | IP20                                                                                     |
| <b>IK</b>                            | 07                                                                                       |
| <b>Isolierklasse</b>                 | <br>CL1 |
| <b>Operating ambient temperature</b> | 0°C +35°C                                                                                |
| <b>Jahre Garantie</b>                | 3                                                                                        |
| <b>Artikelmaße</b>                   | MAX 2000mm Ø600mm - 1.9kg                                                                |
| <b>Verpackungsmaße</b>               | 90x640x640mm - 2.8kg                                                                     |
| <b>Bestückung 1</b>                  |                                                                                          |
| <b>Bestückung</b>                    | LED Eingebaut                                                                            |
| <b>LED Merkmale</b>                  | SMD                                                                                      |
| <b>Lumen der Lichtquelle</b>         | 3780 lm                                                                                  |
| <b>Lumen des Artikels</b>            | 2646 lm                                                                                  |
| <b>Farbtemperatur</b>                | warmweiss 3000K                                                                          |
| <b>Diffusor</b>                      | Diffuse strahlend                                                                        |
| <b>Typischer CRI</b>                 | >80                                                                                      |
| <b>Energieklasse</b>                 | <br>E |
| <b>Elektrische Spezifikationen 1</b> |                                                                                          |
| <b>Eingangsspannung</b>              | 220/240V AC 50/60Hz                                                                      |
| <b>Gesamtabsorbierte Leistung</b>    | 36W                                                                                      |
| <b>Treiber</b>                       | Inklusiv                                                                                 |
| <b>Leistungsfaktor</b>               | >0,9                                                                                     |
| <b>Steuerungssystem</b>              | DALI                                                                                     |



CE