





## Desdy

LED ceiling lamp particularly slim, with a height of only 50 mm. Aluminum structure. Thanks to its square shape and integrated opal diffuser, this lamp offers uniform, glare-free illumination. Ideal for balconies and terraces. Available in three sizes and two colors.

|                                      |   |
|--------------------------------------|---|
| <b>Code</b>                          | <b>3314-69-102</b>  |
| <b>Type</b>                          | Ceiling lamp  |
| <b>Designer</b>                      | S.T. Fabas Luce   |
| <b>Eancode</b>                       | 8019282076780   |
| <b>Customs tariff</b>                | 94051140  |
| <b>Color</b>                         | White   |
| <b>Material</b>                      | Metal and polycarbonate frame   |
| <b>IP</b>                            | IP54  |
| <b>IK</b>                            | 10  |
| <b>Insulation Class</b>              |  CL2 |
| <b>Operating ambient temperature</b> | -10°C +35°C   |
| <b>Years of warranty</b>             | 3   |
| <b>Item Dimensions</b>               | 180x180x50mm - 0,6kg  |
| <b>Packaging Dimensions</b>          | 185x185x60mm - 0.7kg  |
| <b>Light Source 1</b>                |   |
| <b>Light source</b>                  | LED Built-in  |
| <b>LED Characteristics</b>           | SMD   |
| <b>Light Source Lumen</b>            | 1050 lm   |
| <b>Item Lumen</b>                    | 867 lm  |
| <b>Color Temperature</b>             | Warm white 3000K  |
| <b>Optics</b>                        | Diffused beam   |
| <b>Minimum CRI</b>                   | >80   |
| <b>Energy Efficiency Class</b>       |  F |
| <b>Electrical specifications 1</b>   |   |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz   |
| <b>Total Absorbed Power</b>          | 10W   |
| <b>Driver</b>                        | Included  |
| <b>Power Factor</b>                  | >0,9  |
| <b>Control System</b>                | On/Off  |

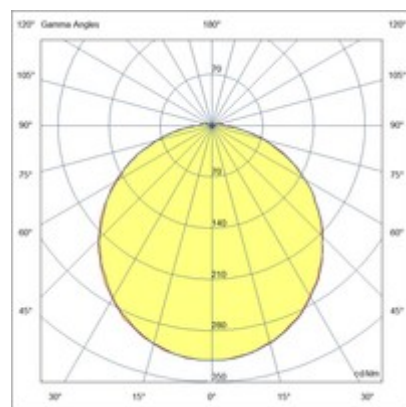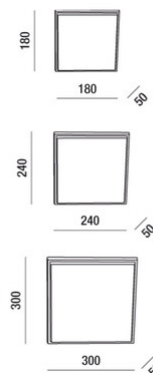

CE