





## Ravello 595X595

Ravello is a recessed lighting fixture, with a 600x600mm modular structure. It can be installed on the ceiling, suspended and clip-in, with special accessories. Ravello is a LED panel with innovative traits, characterized by great versatility of use, equipped with a backlight optical system that eliminates progressive yellowing of the screen over time. The microprismatic screen guarantees a UGR<19 factor, equipped with LED 3000K or 4000K 42W, CRI 90.

<b>Code</b>	<b>6520-04-002</b>
<b>Type</b>	Recessed lamp
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282546887
<b>Customs tariff</b>	94054239
<b>Color</b>	White
<b>Material</b>	Metal frame / Opal prismatic diffuser
<b>IP</b>	IP40
<b>IK</b>	04
<b>Insulation Class</b>	 CL2
<b>Operating ambient temperature</b>	-20°+50°C
<b>Years of warranty</b>	3
<b>Item Dimensions</b>	595x595x35mm - 1.7kg
<b>Packaging Dimensions</b>	635x700x40mm - 2.3kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Number of LEDs</b>	72
<b>Light Source Lumen</b>	4814 lm
<b>Item Lumen</b>	3800 lm
<b>Color Temperature</b>	Natural white 4000 K
<b>Optics</b>	Prismatic
<b>Typical CRI</b>	90
<b>Minimum CRI</b>	>90
<b>Luminous Flux Maintenance</b>	>54.000h L80 B50
<b>UGR</b>	<19
<b>Energy Efficiency Class</b>	
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	42W
<b>Driver</b>	Included
<b>Power Factor</b>	>0,9
<b>Control System</b>	DALI/Push

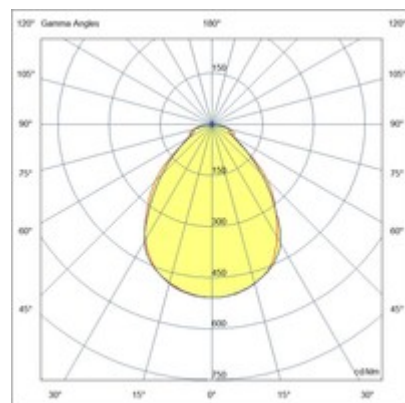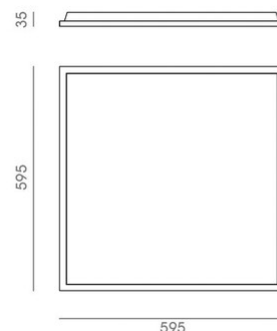

CE