

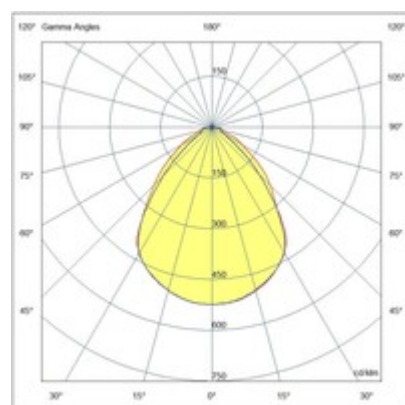
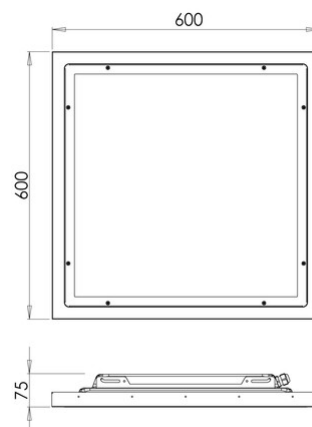


## Skilos

Skilos recessed for clip-in ceilings is a lighting fixture with a 600x600 mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI >90. The IP65 degree of protection is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises.

<b>Code</b>	<b>6524-14-705</b>
<b>Type</b>	Recessed lamp
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282552727
<b>Customs tariff</b>	94054239
<b>Color</b>	White
<b>Material</b>	Metal frame / Clear prismatic diffuser
<b>IP</b>	IP65
<b>IK</b>	04
<b>Insulation Class</b>	 CL1
<b>Operating ambient temperature</b>	-20°C +45°C
<b>Years of warranty</b>	5
<b>Item Dimensions</b>	600x600x75mm - 6.6kg
<b>Packaging Dimensions</b>	640x640x80mm - 7.3kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Light Source Lumen</b>	5861 lm
<b>Item Lumen</b>	4485 lm
<b>Color Temperature</b>	Natural white 4000 K
<b>Optics</b>	Prismatic
<b>Minimum CRI</b>	>90
<b>UGR</b>	<19
<b>Energy Efficiency Class</b>	 A+ C
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	25W
<b>Driver</b>	Included
<b>Power Factor</b>	> 0.9
<b>Control System</b>	DALI/Push/On-Off



CE