
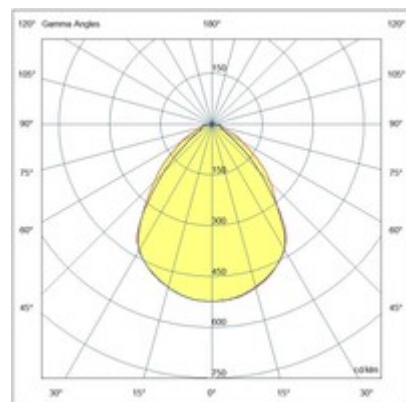


Skilos

Skilos recessed for clip-in ceilings is a lighting fixture with a 600x600 mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI >90. The IP65 degree of protection is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises.

Code	6524-14-715
Type	Recessed lamp
Designer	S.T. Fabas Luce
Eancode	8019282552734
Customs tariff	94054239
Color	White
Material	Metal frame / Clear prismatic diffuser
IP	IP65
IK	04
Insulation Class	 CL1
Operating ambient temperature	-20°C +45°C
Years of warranty	5
Item Dimensions	600x600x75mm - 6.6kg
Packaging Dimensions	640x640x80mm - 7.3kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	5861 lm
Item Lumen	4485 lm
Color Temperature	Natural white 4000 K
Optics	Prismatic
Minimum CRI	>90
UGR	<19
Energy Efficiency Class	 A+ C
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	35W
Driver	Included
Power Factor	> 0.9
Control System	DALI/ Push/ On-Off

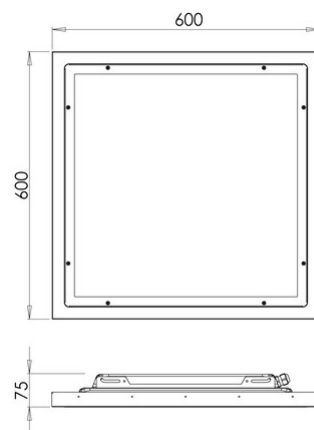

CE