
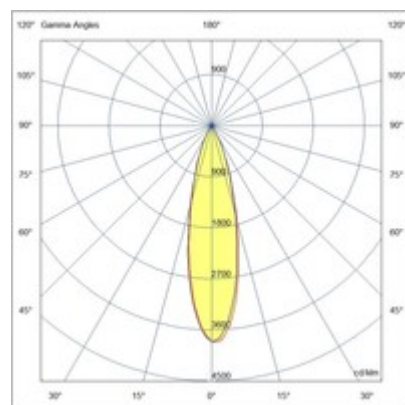


Ermes Light line with optic

LED linear module designed for use in all ERMES system profiles. Made with a multi-cell linear system, these modules guarantee controlled luminance with a UGR <10. Available in two lengths, two color temperatures, On-Off or DALI. The module can be integrated with the other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial) allowing you to create highly personalized lighting configurations that can be adapted to any need.

Code	6525-32-363	
Type	Light Line Profiles	
Eancode	8019282551508	
Customs tariff	94051190	
Color	Black	
Material	Aluminum frame	
IP	IP20	
IK	05	
Insulation Class	 CL3	
Operating ambient temperature	-20°C + 35°C	
Years of warranty	3	
Item Dimensions	328x22x44mm - 0.2kg	
Packaging Dimensions	345x60x60mm - 0.4kg	
	Light Source 1	
Light source	LED Built-in	
LED Characteristics	SMD	
Light Source Lumen	1506 lm	
Item Lumen	1047 lm	
Color Temperature	Warm white 3000K	
Optics	24°	
Typical CRI	>90	
Energy Efficiency Class	A ↑ G F	
	Electrical specifications 1	
Input Voltage	48V DC	
Total Absorbed Power	14W	
Control System	On/Off	



CE