





Ermes Light line with optic

LED linear module designed for use in all ERMES system profiles. Made with a multi-cell linear system, these modules guarantee controlled luminance with a UGR <10. Available in two lengths, two color temperatures, On-Off or DALI. The module can be integrated with the other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial) allowing you to create highly personalized lighting configurations that can be adapted to any need.

Code	6525-32-366
Type	Light Line Profiles
Eancode	8019282556282
Customs tariff	94051190
Color	Black
Material	Aluminum frame
IP	IP40
IK	05
Insulation Class	 CL3
Operating ambient temperature	-20°C + 35°C
Years of warranty	3
Item Dimensions	328x22x44mm - 0.2kg
Packaging Dimensions	345x60x60mm - 0.4kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	1506 lm
Item Lumen	1047 lm
Color Temperature	Warm white 3000K
Optics	24°
Minimum CRI	>90
Energy Efficiency Class	
Electrical specifications 1	
Input Voltage	48V DC
Total Absorbed Power	14W
Control System	DALI

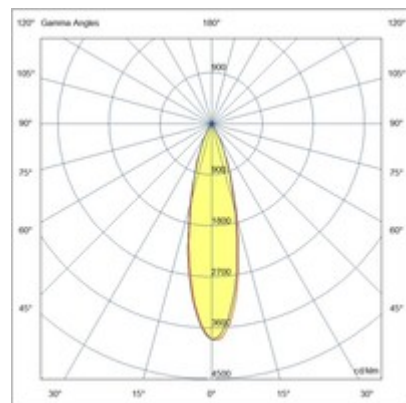

CE