





## Ermes Light line with optic

LED linear module designed for use in all ERMES system profiles. Made with a multi-cell linear system, these modules guarantee controlled luminance with a UGR <10. Available in two lengths, two color temperatures, On-Off or DALI. The module can be integrated with the other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial) allowing you to create highly personalized lighting configurations that can be adapted to any need.

<b>Code</b>	<b>6525-33-663</b>
<b>Type</b>	Light Line Profiles
<b>Eancode</b>	8019282556299
<b>Customs tariff</b>	94051190
<b>Color</b>	Black
<b>Material</b>	Aluminum frame
<b>IP</b>	IP20
<b>IK</b>	05
<b>Insulation Class</b>	 CL3
<b>Operating ambient temperature</b>	-20°C + 35°C
<b>Years of warranty</b>	3
<b>Item Dimensions</b>	652x22x44mm - 0,40kg
<b>Packaging Dimensions</b>	700x65x60mm - 0.8kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	SMD
<b>Light Source Lumen</b>	2720 lm
<b>Item Lumen</b>	1912 lm
<b>Color Temperature</b>	Warm White 2700K
<b>Optics</b>	24°
<b>Minimum CRI</b>	>90
<b>Energy Efficiency Class</b>	
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	48V DC
<b>Total Absorbed Power</b>	28W
<b>Control System</b>	On/Off

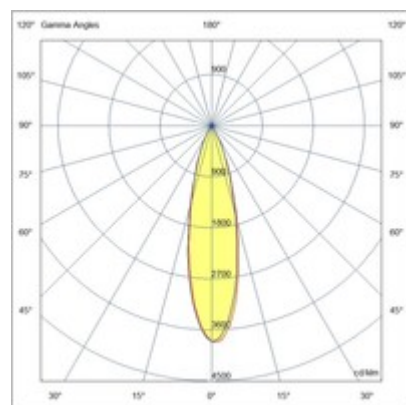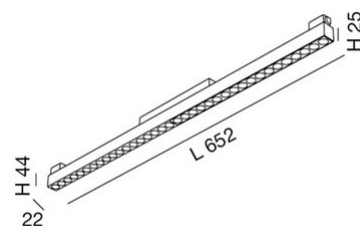

CE