
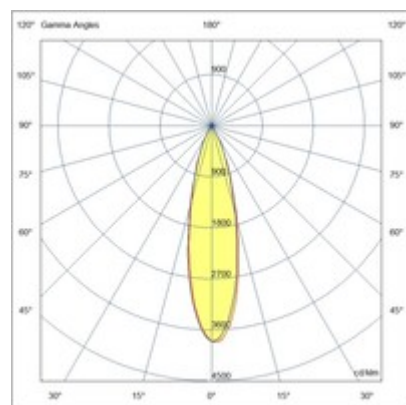


Ermes Light line with optic

LED linear module designed for use in all ERMES system profiles. Made with a multi-cell linear system, these modules guarantee controlled luminance with a UGR <10. Available in two lengths, two color temperatures, On-Off or DALI. The module can be integrated with the other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial) allowing you to create highly personalized lighting configurations that can be adapted to any need.

Code	6525-33-663
Type	Light Line Profiles
Eancode	8019282556299
Customs tariff	94051190
Color	Black
Material	Aluminum frame
IP	IP20
IK	05
Insulation Class	 CL3
Operating ambient temperature	-20°C + 35°C
Years of warranty	3
Item Dimensions	652x22x44mm - 0,40kg
Packaging Dimensions	700x65x60mm - 0.8kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	2720 lm
Item Lumen	1912 lm
Color Temperature	Warm White 2700K
Optics	24°
Minimum CRI	>90
Energy Efficiency Class	
Electrical specifications 1	
Input Voltage	48V DC
Total Absorbed Power	28W
Control System	On/Off

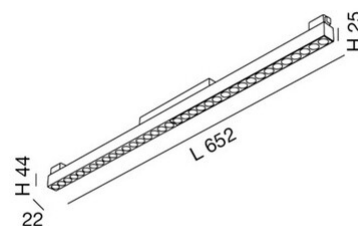

CE