
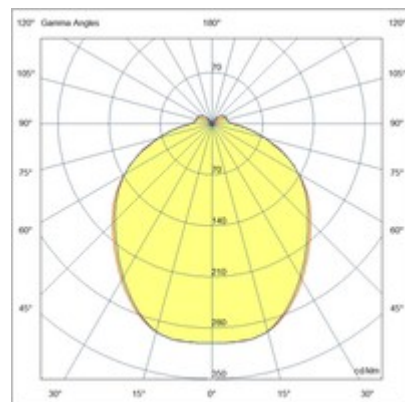


## Ermes suspension

Suspension LED light which has been designed for use in all ERMES system profiles. This illuminator can be combined with a series of metal diffusers of different shapes and colors or a series of borosilicate glass diffusers of different sizes and finishing in summary, this luminaire combined with the wide range of diffusers represents a versatile and high quality lighting solution, suitable for different environments.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6525-56-017</b>                                                                       |
| <b>Type</b>                          | Suspension lamp                                                                          |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                          |
| <b>Eancode</b>                       | 8019282557470                                                                            |
| <b>Customs tariff</b>                | 94059900                                                                                 |
| <b>Color</b>                         | Black                                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                           |
| <b>IP</b>                            | IP20                                                                                     |
| <b>IK</b>                            | 04                                                                                       |
| <b>Insulation Class</b>              | <br>CL3 |
| <b>Operating ambient temperature</b> | -20°C + 35°C                                                                             |
| <b>Years of warranty</b>             | 3                                                                                        |
| <b>Item Dimensions</b>               | 185xMax 1380mm Ø80mm - 0.18kg                                                            |
| <b>Packaging Dimensions</b>          | 200x140x115mm - 0.36kg                                                                   |
| <b>Light Source 1</b>                |                                                                                          |
| <b>Light source</b>                  | Built-in                                                                                 |
| <b>LED Characteristics</b>           | SMD                                                                                      |
| <b>Light Source Lumen</b>            | 1510 lm                                                                                  |
| <b>Item Lumen</b>                    | 1037 lm                                                                                  |
| <b>Color Temperature</b>             | CCT (2700K 3000K 4000K)                                                                  |
| <b>Optics</b>                        | Diffused beam                                                                            |
| <b>Minimum CRI</b>                   | >80                                                                                      |
| <b>Energy Efficiency Class</b>       |       |
| <b>Electrical specifications 1</b>   |                                                                                          |
| <b>Input Voltage</b>                 | 48V DC                                                                                   |
| <b>Total Absorbed Power</b>          | 14W                                                                                      |
| <b>Control System</b>                | Push dimmer                                                                              |

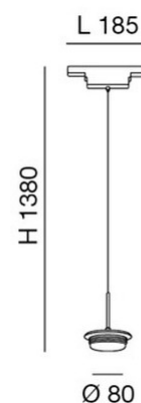

CE