
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it


Ermes Opal light line

LED linear module designed for use in all ERMES system profiles. Opal polycarbonate diffuser, available in three lenghts, two color temperatures, On-Off or DALI. The module can be integrated with other devices of the Ermes family, making it versatile for different applications (residential, commercial, industrial). In particular, the compined use with the corner modules allows you to create hghly customized lighting configurations that can be adapted to any need,



Code	**6525-63-163**
Type	Light Line Profiles
Eancode	8019282556268
Customs tariff	94051190
Color	Black
Material	Aluminum frame
IP	IP20
IK	04
Insulation Class	CL3
Operating ambient temperature	-20°C + 35°C
Years of warranty	5
Item Dimensions	1205x22x44mm - 0.6kg
Packaging Dimensions	1245x65x65mm - 0.8kg
	Light Source 1
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	4472 lm
Item Lumen	1984 lm
Color Temperature	Warm White 2700K
Optics	Diffused beam
Typical CRI	>90
Minimum CRI	>90
Energy Efficiency Class	A G F
	Electrical specifications 1
Input Voltage	48V DC
Total Absorbed Power	40W
Control System	On/Off

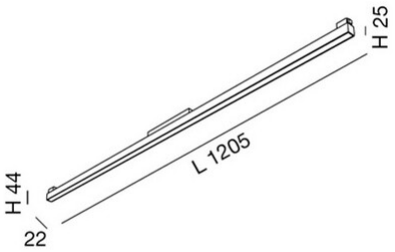

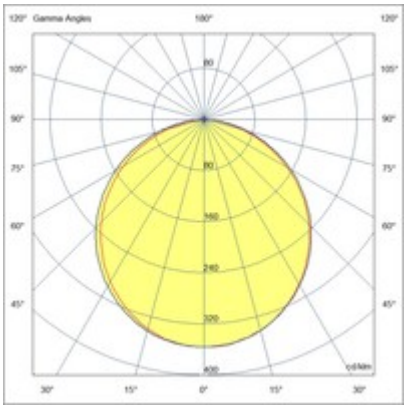

CE