
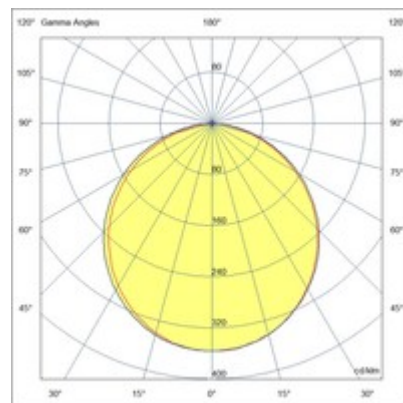


Ermes Opal light line

LED linear module designed for use in all ERMES system profiles. Opal polycarbonate diffuser, available in three lengths, two color temperatures, On-Off or DALI. The module can be integrated with other devices of the Hermes family, making it versatile for different applications (residential, commercial, industrial). In particular, the compined use with the corner modules allows you to create hgily customized lighting configurations that can be adapted to any need,

Code	6525-63-366	
Type	Light Line Profiles	
Eancode	8019282551676	
Customs tariff	94051190	
Color	Black	
Material	Aluminum frame	
IP	IP20	
IK	04	
Insulation Class	 CL3	
Operating ambient temperature	-20°C + 35°C	
Years of warranty	3	
Item Dimensions	305x22x44mm - 0,17kg	
Packaging Dimensions	340x60x60mm - 0.24kg	
	Light Source 1	
Light source	LED Built-in	
LED Characteristics	SMD	
Light Source Lumen	1118 lm	
Item Lumen	496 lm	
Color Temperature	Warm White 2700K	
Optics	Diffused beam	
Typical CRI	>90	
Energy Efficiency Class	 F	
	Electrical specifications 1	
Input Voltage	48V DC	
Total Absorbed Power	12W	
Control System	DALI	



CE