
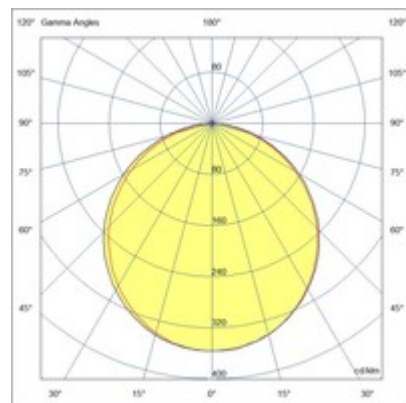


## Ermes Opal light line

LED linear module designed for use in all ERMES system profiles. Opal polycarbonate diffuser, available in three lengths, two color temperatures, On-Off or DALI. The module can be integrated with other devices of the Hermes family, making it versatile for different applications (residential, commercial, industrial). In particular, the compined use with the corner modules allows you to create hgily customized lighting configurations that can be adapted to any need,

|                                      |                                                                                              |
|--------------------------------------|----------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6525-63-663</b>                                                                           |
| <b>Type</b>                          | Light Line Profiles                                                                          |
| <b>Eancode</b>                       | 8019282556251                                                                                |
| <b>Customs tariff</b>                | 94051190                                                                                     |
| <b>Color</b>                         | Black                                                                                        |
| <b>Material</b>                      | Aluminum frame                                                                               |
| <b>IP</b>                            | IP20                                                                                         |
| <b>IK</b>                            | 04                                                                                           |
| <b>Insulation Class</b>              |  <b>CL3</b> |
| <b>Operating ambient temperature</b> | -20°C + 35°C                                                                                 |
| <b>Years of warranty</b>             | 3                                                                                            |
| <b>Item Dimensions</b>               | 605x22x44mm - 0.3kg                                                                          |
| <b>Packaging Dimensions</b>          | 645x65x65mm - 0.4kg                                                                          |
| <b>Light Source 1</b>                |                                                                                              |
| <b>Light source</b>                  | LED Built-in                                                                                 |
| <b>LED Characteristics</b>           | SMD                                                                                          |
| <b>Light Source Lumen</b>            | 2236 lm                                                                                      |
| <b>Item Lumen</b>                    | 992 lm                                                                                       |
| <b>Color Temperature</b>             | Warm White 2700K                                                                             |
| <b>Optics</b>                        | Diffused beam                                                                                |
| <b>Minimum CRI</b>                   | >90                                                                                          |
| <b>Energy Efficiency Class</b>       |           |
| <b>Electrical specifications 1</b>   |                                                                                              |
| <b>Input Voltage</b>                 | 48V DC                                                                                       |
| <b>Total Absorbed Power</b>          | 20W                                                                                          |
| <b>Control System</b>                | On/Off                                                                                       |



CE