
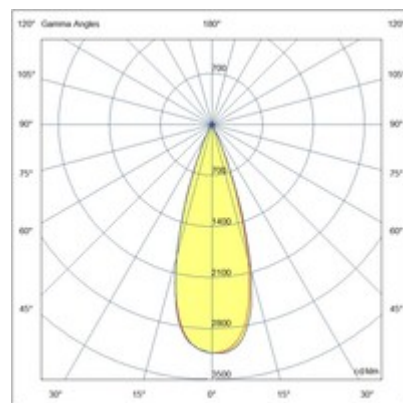


## Ermes spotlight 6W

Thanks to its compact design, the 6W ERMES spotlight for 48V profile system is a lighting device designed to be mounted on 48V tracks. This type of spotlight is ideal for highlighting particular areas or objects in an environment. Available with three types of optics, two color temperatures, in either white or black finishing, On-Off and DALI.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6525-73-466</b>                                                                       |
| <b>Type</b>                          | Track spotlight                                                                          |
| <b>Eancode</b>                       | 8019282552994                                                                            |
| <b>Customs tariff</b>                | 94051190                                                                                 |
| <b>Color</b>                         | Black                                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                           |
| <b>IP</b>                            | IP20                                                                                     |
| <b>IK</b>                            | 04                                                                                       |
| <b>Insulation Class</b>              | <br>CL3 |
| <b>Operating ambient temperature</b> | -20+35°C                                                                                 |
| <b>Years of warranty</b>             | 3                                                                                        |
| <b>Item Dimensions</b>               | 185x35mm Ø35mm - 0.1kg                                                                   |
| <b>Packaging Dimensions</b>          | 210x115x50mm - 0.2kg                                                                     |
| <b>Light Source 1</b>                |                                                                                          |
| <b>Light source</b>                  | LED Built-in                                                                             |
| <b>LED Characteristics</b>           | COB                                                                                      |
| <b>Light Source Lumen</b>            | 500 lm                                                                                   |
| <b>Item Lumen</b>                    | 435 lm                                                                                   |
| <b>Color Temperature</b>             | Warm White 2700K                                                                         |
| <b>Optics</b>                        | 34°                                                                                      |
| <b>Minimum CRI</b>                   | >90                                                                                      |
| <b>Luminous Flux Maintenance</b>     | 50.000h L80 B10                                                                          |
| <b>Energy Efficiency Class</b>       |       |
| <b>Electrical specifications 1</b>   |                                                                                          |
| <b>Input Voltage</b>                 | 48V DC                                                                                   |
| <b>Total Absorbed Power</b>          | 6W                                                                                       |
| <b>Driver</b>                        | Included                                                                                 |
| <b>Control System</b>                | DALI                                                                                     |



CE