
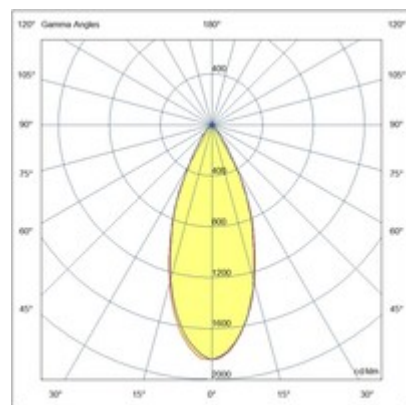


## Ermes spot light 27W

Thanks to its compact design, the 27W ERMES spotlight for 48V profile system is a powerful lighting device designed to be mounted on a 48V track. This type of spotlight is ideal for highlighting particular areas or objects in an environment. Available with two types of optics, two color temperatures in white or black finish, On-Off and DALI.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6525-93-556</b>                                                                       |
| <b>Type</b>                          | Track spotlight                                                                          |
| <b>Eancode</b>                       | 8019282551379                                                                            |
| <b>Customs tariff</b>                | 94051190                                                                                 |
| <b>Color</b>                         | White                                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                           |
| <b>IP</b>                            | IP20                                                                                     |
| <b>IK</b>                            | 04                                                                                       |
| <b>Insulation Class</b>              | <br>CL3 |
| <b>Operating ambient temperature</b> | -20°C + 35°C                                                                             |
| <b>Years of warranty</b>             | 3                                                                                        |
| <b>Item Dimensions</b>               | 185x30mm Ø70mm - 0.5kg                                                                   |
| <b>Packaging Dimensions</b>          | 210x210x90mm - 0.7kg                                                                     |
| <b>Light Source 1</b>                |                                                                                          |
| <b>Light source</b>                  | LED Built-in                                                                             |
| <b>LED Characteristics</b>           | COB                                                                                      |
| <b>Light Source Lumen</b>            | 2700 lm                                                                                  |
| <b>Item Lumen</b>                    | 1919 lm                                                                                  |
| <b>Color Temperature</b>             | Warm White 2700K                                                                         |
| <b>Optics</b>                        | 43°                                                                                      |
| <b>Typical CRI</b>                   | 90                                                                                       |
| <b>Luminous Flux Maintenance</b>     | 50.000h L80 B10                                                                          |
| <b>Energy Efficiency Class</b>       |       |
| <b>Electrical specifications 1</b>   |                                                                                          |
| <b>Input Voltage</b>                 | 48V DC                                                                                   |
| <b>Total Absorbed Power</b>          | 27W                                                                                      |
| <b>Driver</b>                        | Included                                                                                 |
| <b>Control System</b>                | DALI                                                                                     |



CE