


## Turner Suspension double emission

Modular linear profile in extruded aluminum, with opal or microprismatic polycarbonate diffuser UGR<19. Available in 29W+15W/m. warm white or natural. Integrated power supply for On/Off and DALI; emergency module available on demand. Suitable to be installed as suspension in the bidirectional configuration. Complete with suspension and power cable max 2m.

|                                      |                                                                                     |                                                                                     |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6853-22-222</b>                                                                  |                                                                                     |
| <b>Type</b>                          | Light Line Profiles - Suspension double emission                                    |                                                                                     |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                     |                                                                                     |
| <b>Eancode</b>                       | 8019282107811                                                                       |                                                                                     |
| <b>Customs tariff</b>                | 94054239                                                                            |                                                                                     |
| <b>Color</b>                         | Aluminum                                                                            |                                                                                     |
| <b>Material</b>                      | Aluminum frame                                                                      |                                                                                     |
| <b>IP</b>                            | IP40                                                                                |                                                                                     |
| <b>IK</b>                            | 08                                                                                  |                                                                                     |
| <b>Insulation Class</b>              |    |                                                                                     |
| <b>Operating ambient temperature</b> | -20C° +45°                                                                          |                                                                                     |
| <b>Years of warranty</b>             | 5                                                                                   |                                                                                     |
| <b>Made In</b>                       | Italy                                                                               |                                                                                     |
| <b>Item Dimensions</b>               | 77x95xMax 2000mm - 3,950/mtkg                                                       |                                                                                     |
|                                      | <b>Light Source 1</b>                                                               | <b>Light Source 2</b>                                                               |
| <b>Light source</b>                  | LED Built-in                                                                        | LED Built-in                                                                        |
| <b>LED Characteristics</b>           | SMD                                                                                 | SMD                                                                                 |
| <b>Number of LEDs</b>                | 70 LED/m                                                                            | 140 LED/mt                                                                          |
| <b>Light Source Lumen</b>            | 3470 lm/m                                                                           | 1290 lm/m                                                                           |
| <b>Item Lumen</b>                    | 2146 lm/m                                                                           | 1131 lm/m                                                                           |
| <b>Color Temperature</b>             | Warm white 3000K                                                                    | Warm white 3000K                                                                    |
| <b>Optics</b>                        | Prismatic                                                                           | Opal                                                                                |
| <b>Typical CRI</b>                   | 85                                                                                  |                                                                                     |
| <b>Minimum CRI</b>                   | 80                                                                                  | 80                                                                                  |
| <b>Luminous Flux Maintenance</b>     | >100.000 h L70 B50                                                                  | >80.000 h L70 B50                                                                   |
| <b>UGR</b>                           | <19                                                                                 |                                                                                     |
| <b>Energy Efficiency Class</b>       |  |  |
|                                      | <b>Electrical specifications 1</b>                                                  | <b>Electrical specifications 2</b>                                                  |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz                                                                 | 220/240V AC 50/60Hz                                                                 |
| <b>Total Absorbed Power</b>          | 29W/ml                                                                              | 15W/ml                                                                              |
| <b>Driver</b>                        | Included                                                                            | Included                                                                            |
| <b>Control System</b>                | DALI                                                                                | DALI                                                                                |
| <b>Power Supply Type</b>             | Costant Current                                                                     | Costant Current                                                                     |
| <b>Driver Output</b>                 | 24V DC                                                                              | 24V DC                                                                              |
| <b>Driver Input</b>                  | 220 - 240 VAC 50/60 Hz                                                              | 220 - 240 VAC 50/60 Hz                                                              |

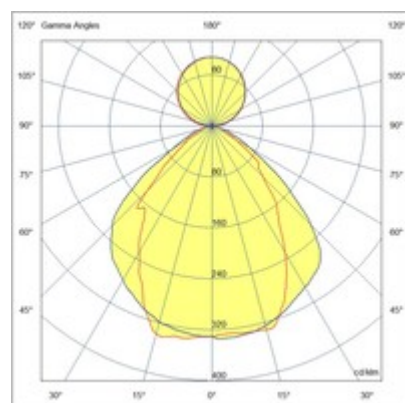

CE