**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

# Egeo 160W

High efficiency floodlight for functional and architectural lighting. Suitable especially for outdoor areas. It has a wide range of optics to meet all design needs. Device made of die-cast aluminum copper free EN AB 44100. Polyester painting QUALICOAT (Class 1), corrosion resistant to salt spray for 28 days, conforms to Standard IEC60092-306. Available in grey color RAL 7040, INOX brackets.

| | |
|---|---|
| **Code** | **6916-04-024** |
| **Type** | Outdoor Projector |
| **Designer** | S.T. Fabas Luce |
| **Eancode** | 8019282106104 |
| **Customs tariff** | 94054239 |
| **Color** | Grey RAL 7040 |
| **Material** | Aluminum frame |
| **IP** | IP65 |
| **IK** | 07 |
| **Insulation Class** | CL1 |
| **Operating ambient temperature** | -20°C +50°C |
| **Years of warranty** | 5 |
| **Made In** | Italy |
| **Item Dimensions** | 384x123x319mm - 6.9kg |
| **Packaging Dimensions** | 420x420x170mm - 7.3kg |
| | **Light Source 1** |
| **Light source** | LED Built-in |
| **LED Characteristics** | Power LED |
| **Light Source Lumen** | 18200 lm |
| **Item Lumen** | 13860 lm |
| **Color Temperature** | Natural white 4000 K |
| **Optics** | Asymmetric |
| **Minimum CRI** | >80 |
| **Luminous Flux Maintenance** | 60.000h L70 B50 |
| **Energy Efficiency Class** | A G E |
| | **Electrical specifications 1** |
| **Input Voltage** | 220/240V AC 50/60Hz |
| **Total Absorbed Power** | 160W |
| **Driver** | Included |
| **Power Factor** | >0,9 |
| **Control System** | On/Off |

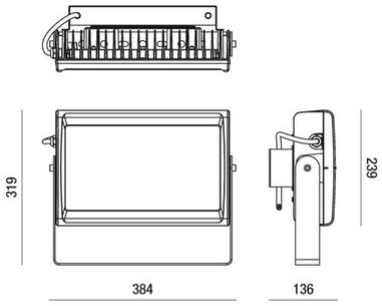


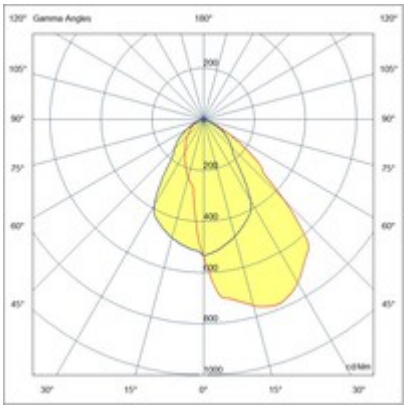

CE