Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it


Millet Suspension double emission


Extruded aluminium profile with 10 cm pitch cut-to-size, with opal or prismatic polycarbonate diffuser UGR<19. Dual light emission, 23W/m downwards, 15W/m upwards. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed suspended, with L2000mm cable, other sizes on request.



Code	**6969-24-202**	
Type	Light Line Profiles - Suspension double emission	
Designer	S.T. Fabas Luce	
Eancode	8019282520016	
Customs tariff	94054239	
Color	Aluminum	
Material	Aluminum frame and polycarbonate	
IP	IP40	
IK	08	
Insulation Class	CL1	
Operating ambient temperature	-25C° +45C°	
Years of warranty	5	
Made In	Italy	
Item Dimensions	70x46xMax 2000mm - 2,2/mkg	
	Light Source 1	**Light Source 2**
Light source	LED Built-in	LED Included
LED Characteristics	SMD	SMD
Number of LEDs	80 LED/mt	140 LED/mt
Light Source Lumen	3580 lm/m	1440 lm/m
Item Lumen	2346 lm/m	1067 lm/m
Color Temperature	Natural white 4000 K	Natural white 4000 K
Optics	Prismatic	Opal
Typical CRI	85	
Minimum CRI	80	80
Luminous Flux Maintenance	>100.000 h L80 B10	>80.000 h L70 B50
UGR	<19	
Energy Efficiency Class	C	E
	Electrical specifications 1	**Electrical specifications 2**
Input Voltage	220/240V AC 50/60Hz	220/240V AC 50/60Hz
Total Absorbed Power	23W/ml	15W/ml
Driver	Included	Included
Control System	On/Off	On/Off
Power Supply Type	Costant Current	Costant Current
Driver Output	350mA	24V DC
Driver Input	220 - 240 VAC 50/60 Hz	220 - 240 VAC 50/60 Hz





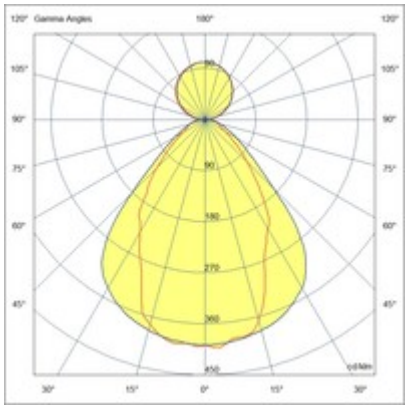

CE