**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

# Millet Recessed frameless

Extruded aluminum profile with cuts every 10 cm., with opal or prismatic polycarbonate diffuser UGR<19. Available in Warm 169lm/W or Natural white 180lm/W temperatures with mid power led 23/Wm. Integrated power supply for On/Off and DALI power supplies, emergency module available on demand.
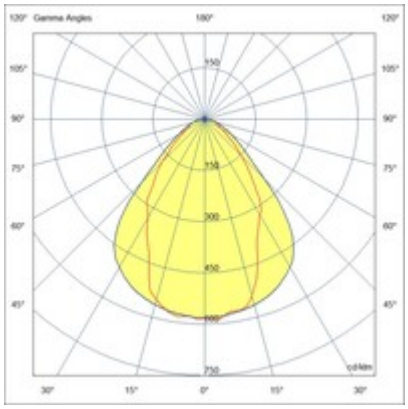
| | |
|---|---|
| **Code** | **6971-64-222** |
| **Type** | Light Line Profiles – Recessed frameless |
| **Designer** | S.T. Fabas Luce |
| **Eancode** | 8019282520399 |
| **Customs tariff** | 94054239 |
| **Color** | Black |
| **Material** | Aluminum frame and polycarbonate |
| **IP** | IP40 |
| **IK** | 08 |
| **Insulation Class** | CL1 |
| **Hole dimension** | 52 X L + 20 |
| **Operating ambient temperature** | -25C° +45C° |
| **Years of warranty** | 5 |
| **Item Dimensions** | 46x122mm - 2,2/mkg |
| | **Light Source 1** |
| **Light source** | LED Built-in |
| **LED Characteristics** | SMD |
| **Number of LEDs** | 80 LED/mt |
| **Light Source Lumen** | 3580 lm/m |
| **Item Lumen** | 2346 lm/m |
| **Color Temperature** | Natural white 4000 K |
| **Optics** | Prismatic |
| **Typical CRI** | 85 |
| **Minimum CRI** | 80 |
| **Luminous Flux Maintenance** | >100.000 h L80 B10 |
| **UGR** | <19 |
| **Energy Efficiency Class** | A G C |
| | **Electrical specifications 1** |
| **Input Voltage** | 220/240V AC 50/60Hz |
| **Total Absorbed Power** | 23W/ml |
| **Driver** | Included |
| **Control System** | DALI |
| **Power Supply Type** | Costant Current |
| **Driver Output** | 350mA |
| **Driver Input** | 220 - 240 VAC 50/60 Hz |