





## RUBENS 16W DALI

Adjustable floodlight with adapter for installation on a track, mains voltage for 16W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 15°, 28°, 41° optics.

<b>Code</b>	<b>6973-92-266</b>
<b>Type</b>	Track spotlight
<b>Designer</b>	S.T. Fabas Luce
<b>Eancode</b>	8019282527299
<b>Customs tariff</b>	94054239
<b>Color</b>	Black
<b>Material</b>	Aluminum frame
<b>IP</b>	IP20
<b>IK</b>	04
<b>Insulation Class</b>	 CL2
<b>Operating ambient temperature</b>	-20°C + 35°C
<b>Years of warranty</b>	5
<b>Made In</b>	Italy
<b>Item Dimensions</b>	95mm Ø55mm - 0.38kg
<b>Packaging Dimensions</b>	200x165x70mm - 0.52kg
<b>Light Source 1</b>	
<b>Light source</b>	LED Built-in
<b>LED Characteristics</b>	COB
<b>Light Source Lumen</b>	1260 lm
<b>Item Lumen</b>	1060 lm
<b>Color Temperature</b>	Warm white 3000K
<b>Optics</b>	15°
<b>Typical CRI</b>	97
<b>Minimum CRI</b>	90
<b>Luminous Flux Maintenance</b>	50.000h L80 B10
<b>Energy Efficiency Class</b>	
<b>Electrical specifications 1</b>	
<b>Input Voltage</b>	220/240V AC 50/60Hz
<b>Total Absorbed Power</b>	16W
<b>Driver</b>	Included
<b>Power Factor</b>	>0,9
<b>Control System</b>	DALI

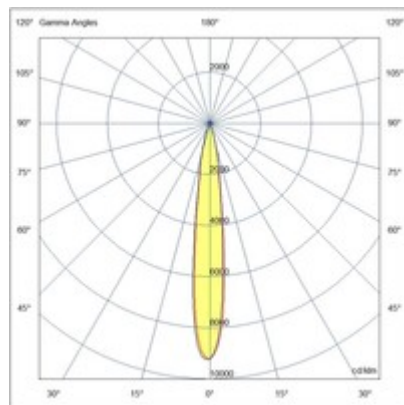

CE