
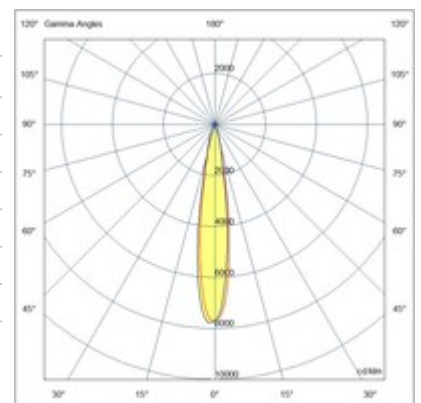


RUBENS 28W ON-OFF

Adjustable floodlight with adapter for installation on a track, mains voltage for 28W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 16°, 21°, 43° optics.

Code	6974-94-264	
Type	Track spotlight	
Designer	S.T. Fabas Luce	
Eancode	8019282527428	
Customs tariff	94054239	
Color	Black	
Material	Aluminum frame	
IP	IP20	
IK	04	
Insulation Class	 CL2	
Operating ambient temperature	-20°C + 35°C	
Years of warranty	5	
Item Dimensions	118mm Ø70mm - 0.59kg	
Packaging Dimensions	90x210x210mm - 0.74kg	
	Light Source 1	
Light source	LED Built-in	
LED Characteristics	COB	
Light Source Lumen	2720 lm	
Item Lumen	2368 lm	
Color Temperature	Natural white 4000 K	
Optics	16°	
Typical CRI	97	
Minimum CRI	90	
Luminous Flux Maintenance	50.000h L80 B10	
Energy Efficiency Class	 E	
	Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz	
Total Absorbed Power	28W	
Driver	Included	
Power Factor	>0,9	
Control System	On/Off	
Driver Input	220-240V AC	



CE