
**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

# RUBENS 28W ON-OFF


Adjustable floodlight with adapter for installation on a track, mains voltage for 28W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 16°, 21°, 43° optics.



| | |
|---|---|
| **Code** | **6974-94-564** |
| **Type** | Track spotlight |
| **Designer** | S.T. Fabas Luce |
| **Eancode** | 8019282527442 |
| **Customs tariff** | 94054239 |
| **Color** | Black |
| **Material** | Aluminum frame |
| **IP** | IP20 |
| **IK** | 04 |
| **Insulation Class** | CL2 |
| **Operating ambient temperature** | -20°C + 35°C |
| **Years of warranty** | 5 |
| **Item Dimensions** | 118mm Ø70mm - 0.59kg |
| **Packaging Dimensions** | 90x210x210mm - 0.74kg |

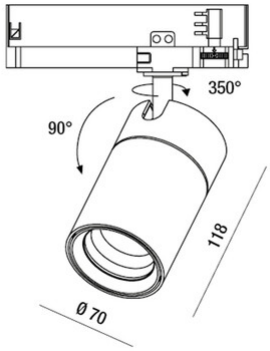


| | |
|---|---|
| | **Light Source 1** |
| **Light source** | LED Built-in |
| **LED Characteristics** | COB |
| **Light Source Lumen** | 2720 lm |
| **Item Lumen** | 2145 lm |
| **Color Temperature** | Natural white 4000 K |
| **Optics** | 43° |
| **Typical CRI** | 97 |
| **Minimum CRI** | 90 |
| **Luminous Flux Maintenance** | 50.000h L80 B10 |
| **Energy Efficiency Class** | A G E |

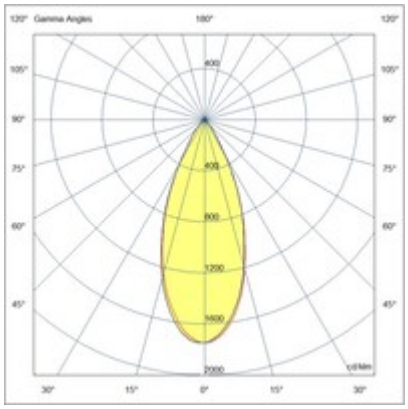

| | |
|---|---|
| | **Electrical specifications 1** |
| **Input Voltage** | 220/240V AC 50/60Hz |
| **Total Absorbed Power** | 28W |
| **Driver** | Included |
| **Power Factor** | >0,9 |
| **Control System** | On/Off |
| **Driver Input** | 220-240V AC |

CE