
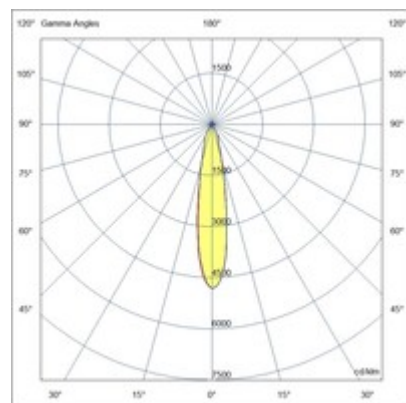


## RUBENS 36W BASKET

Adjustable recessed LED projector for basket, gimbal, made of die-cast aluminium, with a compact light design and a rotation on both axis vertical and horizontal. COB REAL COLOR CRI 97 guarantees an excellent color rendering and a particular brilliancy. The reflectors grant high system efficiency and they are available in different beam angles. Available in 28W and 36W Cob Led, On/Off. RUBENS is a versatile product suitable for all types of installation, from commercial to cultural areas.

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6975-72-254</b>                                                                       |
| <b>Type</b>                          | Basket recessed                                                                          |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                          |
| <b>Eancode</b>                       | 8019282529736                                                                            |
| <b>Customs tariff</b>                | 94054239                                                                                 |
| <b>Color</b>                         | White                                                                                    |
| <b>Material</b>                      | Aluminum frame                                                                           |
| <b>IP</b>                            | IP40                                                                                     |
| <b>IK</b>                            | 03                                                                                       |
| <b>Insulation Class</b>              | <br>CL2 |
| <b>Operating ambient temperature</b> | -20°C +35°C                                                                              |
| <b>Years of warranty</b>             | 5                                                                                        |
| <b>Item Dimensions</b>               | 129mm Ø111mm - 1.3kg                                                                     |
| <b>Packaging Dimensions</b>          | 210x190x210mm - 1.6kg                                                                    |
| <b>Light Source 1</b>                |                                                                                          |
| <b>Light source</b>                  | LED Built-in                                                                             |
| <b>LED Characteristics</b>           | COB                                                                                      |
| <b>Light Source Lumen</b>            | 3800 lm                                                                                  |
| <b>Item Lumen</b>                    | 2768 lm                                                                                  |
| <b>Color Temperature</b>             | Warm white 3000K                                                                         |
| <b>Optics</b>                        | 20°                                                                                      |
| <b>Typical CRI</b>                   | 97                                                                                       |
| <b>Minimum CRI</b>                   | 90                                                                                       |
| <b>Luminous Flux Maintenance</b>     | 50.000h L80 B10                                                                          |
| <b>Energy Efficiency Class</b>       | <br>E |
| <b>Electrical specifications 1</b>   |                                                                                          |
| <b>Input Voltage</b>                 | 220/240V AC 50/60Hz                                                                      |
| <b>Total Absorbed Power</b>          | 36W                                                                                      |
| <b>Driver</b>                        | Included                                                                                 |
| <b>Power Factor</b>                  | >0,9                                                                                     |
| <b>Control System</b>                | On/Off                                                                                   |



CE