


## RUBENS 36W BASKET

Adjustable recessed LED projector for basket, gimbal, made of die-cast aluminium, with a compact light design and a rotation on both axis vertical and horizontal. COB REAL COLOR CRI 97 guarantees an excellent color rendering and a particular brilliancy. The reflectors grant high system efficiency and they are available in different beam angles. Available in 28W and 36W Cob Led, On/Off. RUBENS is a versatile product suitable for all types of installation, from commercial to cultural areas.

|                                    |                                                                                          |
|------------------------------------|------------------------------------------------------------------------------------------|
| Code                               | 6975-74-264                                                                              |
| Type                               | Basket recessed                                                                          |
| Designer                           | S.T. Fabas Luce                                                                          |
| Eancode                            | 8019282529774                                                                            |
| Customs tariff                     | 94054239                                                                                 |
| Color                              | Black                                                                                    |
| Material                           | Aluminum frame                                                                           |
| IP                                 | IP40                                                                                     |
| IK                                 | 03                                                                                       |
| Insulation Class                   | <br>CL2 |
| Operating ambient temperature      | -20°C +35°C                                                                              |
| Years of warranty                  | 5                                                                                        |
| Item Dimensions                    | 129mm Ø111mm - 1.3kg                                                                     |
| Packaging Dimensions               | 210x190x210mm - 1.6kg                                                                    |
| <b>Light Source 1</b>              |                                                                                          |
| Light source                       | LED Built-in                                                                             |
| LED Characteristics                | COB                                                                                      |
| Number of LEDs                     | 1                                                                                        |
| Light Source Lumen                 | 4000 lm                                                                                  |
| Item Lumen                         | 3105 lm                                                                                  |
| Color Temperature                  | Natural white 4000 K                                                                     |
| Optics                             | 20°                                                                                      |
| Typical CRI                        | 97                                                                                       |
| Minimum CRI                        | 90                                                                                       |
| Luminous Flux Maintenance          | 50.000h L80 B10                                                                          |
| Energy Efficiency Class            |       |
| <b>Electrical specifications 1</b> |                                                                                          |
| Input Voltage                      | 220/240V AC 50/60Hz                                                                      |
| Total Absorbed Power               | 36W                                                                                      |
| Driver                             | Included                                                                                 |
| Power Factor                       | >0,9                                                                                     |
| Control System                     | On/Off                                                                                   |

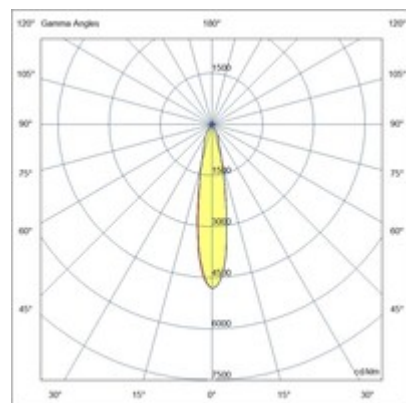

CE