
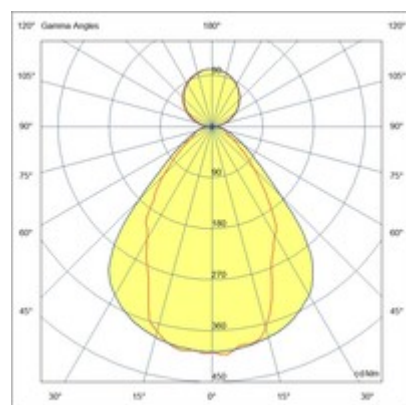



Millet Wall lamp

Extruded aluminium profile with 10 cm pitch cut-to-size. Dual light emission, 23W/m downwards, 15W/m upwards. Diffuser in opal or prismatic polycarbonate UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed on wall, both vertically and horizontally.

Code	6992-22-202	
Type	Light Line Profiles – Wall lamp	
Designer	S.T. Fabas Luce	
Eancode	8019282556732	
Customs tariff	94054239	
Color	Aluminum	
Material	Aluminum frame and polycarbonate	
IP	IP40	
IK	08	
Insulation Class	 CL1	
Operating ambient temperature	-25C° +45C°	
Years of warranty	5	
Made In	Italy	
Item Dimensions	46x70mm - 2.2/mkg	
	Light Source 1	Light Source 2
Light source	LED Built-in	LED Included
LED Characteristics	SMD	SMD
Number of LEDs	80 LED/mt	140 LED/mt
Light Source Lumen	3380 lm/m	1290 lm/m
Item Lumen	2196 lm/m	1017 lm/m
Color Temperature	Warm white 3000K	Warm white 3000K
Optics	Prismatic	Opal
Typical CRI	85	
Minimum CRI	80	80
Luminous Flux Maintenance	>100.000 h L80 B10	>80.000 h L70 B50
UGR	<19	
Energy Efficiency Class	 D	 E
	Electrical specifications 1	Electrical specifications 2
Input Voltage	220/240V AC 50/60Hz	220/240V AC 50/60Hz
Total Absorbed Power	23W/ml	15W/ml
Driver	Included	Included
Control System	On/Off	On/Off
Power Supply Type	Costant Current	Costant Current
Driver Output	350mA	24V DC
Driver Input	220 - 240 VAC 50/60 Hz	220 - 240 VAC 50/60 Hz

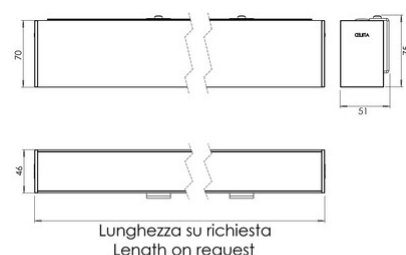

CE