
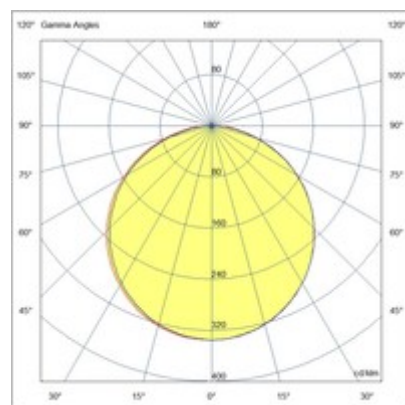


## Kate IP40

Extruded anodized aluminum Profile Ø21, caps and fixing springs included. Customized product with customized cut each 10 cm. Indoor aluminum LED bar. Standard mounting with adjustable springs. Adjustable brackets possible on demand.

|                                      |                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6995-04-001</b>                                                                    |
| <b>Type</b>                          | Light Line Profiles                                                                   |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                       |
| <b>Eancode</b>                       | 8019282534662                                                                         |
| <b>Customs tariff</b>                | 94054239                                                                              |
| <b>Color</b>                         | Shiny anodized aluminum                                                               |
| <b>Material</b>                      | Aluminum frame                                                                        |
| <b>IP</b>                            | IP40                                                                                  |
| <b>IK</b>                            | 08                                                                                    |
| <b>Insulation Class</b>              |  CL3 |
| <b>Operating ambient temperature</b> | -20°C +50°C                                                                           |
| <b>Years of warranty</b>             | 3                                                                                     |
| <b>Made In</b>                       | Italy                                                                                 |
| <b>Item Dimensions</b>               | Ø21mm - 0,45/mkg                                                                      |
| <b>Light Source 1</b>                |                                                                                       |
| <b>Light source</b>                  | LED Built-in                                                                          |
| <b>LED Characteristics</b>           | SMD                                                                                   |
| <b>Number of LEDs</b>                | 160 LED/mt                                                                            |
| <b>Light Source Lumen</b>            | 2800 lm/m                                                                             |
| <b>Item Lumen</b>                    | 1657 lm/m                                                                             |
| <b>Color Temperature</b>             | Natural white 4000 K                                                                  |
| <b>Optics</b>                        | 120° / 120° opal / 60°                                                                |
| <b>Minimum CRI</b>                   | >80                                                                                   |
| <b>Energy Efficiency Class</b>       |  E |
| <b>Electrical specifications 1</b>   |                                                                                       |
| <b>Input Voltage</b>                 | 24V DC                                                                                |
| <b>Total Absorbed Power</b>          | 20W/ml                                                                                |
| <b>Driver</b>                        | Not included                                                                          |



CE