
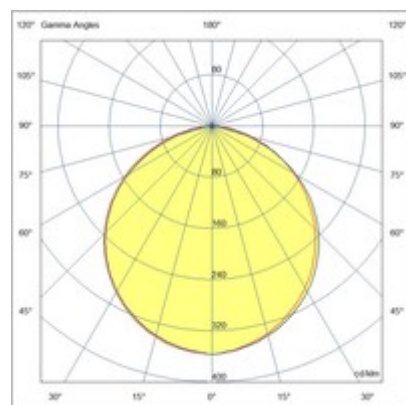


Kate IP65

Round polycarbonate and aluminum profile, Ø25 mm, for outdoor direct illumination of rooms, walls and objects. Fixing with adjustable springs, 360° rotation, dull chrome brackets on demand. Provided wired with a 1 m neoprene cable. IP65 protection rating. Customized product cut each 10 cm.

Code	6996-04-003
Type	Light Line Profiles
Designer	S.T. Fabas Luce
Eancode	8019282534778
Customs tariff	94054239
Color	Shiny anodized aluminum
Material	Aluminum frame
IP	IP65
IK	08
Insulation Class	 CL3
Operating ambient temperature	-20°C +50°C
Years of warranty	3
Made In	Italy
Item Dimensions	Ø250mm - 0,75/mkg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Number of LEDs	140 LED/mt
Light Source Lumen	1200 lm/m
Item Lumen	725 lm/m
Color Temperature	Natural white 4000 K
Optics	120° / 120° opal / 60°
Minimum CRI	>80
Energy Efficiency Class	 E
Electrical specifications 1	
Input Voltage	24V DC
Total Absorbed Power	9,6W/ml
Driver	Not included



CE