





## Skilos

Skilos recessed for plasterboard false ceilings is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the microprismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

<b>Code</b>	<b>6524-24-715</b>
<b>Type</b>	Lampe encastrée
<b>Designer</b>	S.T. Fabas Luce
<b>Code Barres</b>	8019282552772
<b>Tarif douanier</b>	94054239
<b>Couleur</b>	Blanc
<b>Matériel</b>	Structure métallique / Diffuseur transparent prismatique
<b>IP</b>	IP65
<b>IK</b>	04
<b>Classe d'isolation</b>	 CL1
<b>Operating ambient temperature</b>	-20°C +45°C
<b>Ans de garantie</b>	5
<b>Dimensions de la lampe</b>	610x610x120mm - 7.0kg
<b>Dimensions de la boîte</b>	650x650x150mm - 8.3kg
	<b>Source de lumière 1</b>
<b>Source</b>	LED Intégré
<b>Caractéristiques des LEDs</b>	SMD
<b>Lumens de la source lumineuse</b>	5861 lm
<b>Lumen de l'article</b>	4485 lm
<b>Température de couleur</b>	Natural white 4000 K
<b>Optique</b>	Prismatique
<b>CRI minimum</b>	>90
<b>UGR</b>	<19
<b>Classe énergétique</b>	 A ↑ G C
	<b>Spécifications électriques 1</b>
<b>Tension d'alimentation</b>	220/240V AC 50/60Hz
<b>Puissance totale absorbée</b>	35W
<b>Driver</b>	Inclus
<b>Facteur de puissance</b>	> 0.9
<b>Système de contrôle</b>	DALI/Push/On-Off

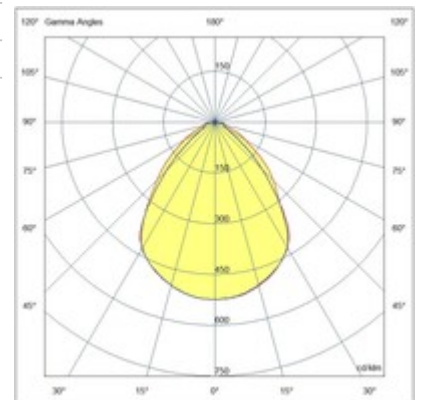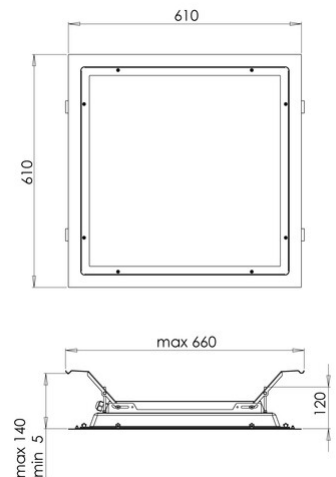

CE