
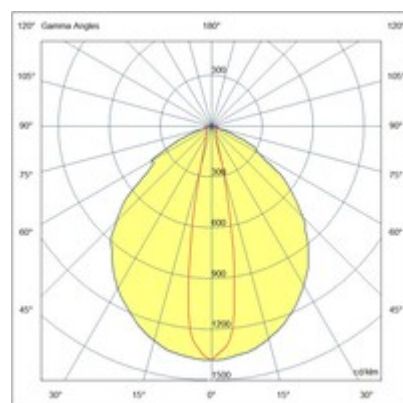


# Nizza

High efficiency floodlight for functional and architectural lighting. Suitable especially for outdoor areas. It has a wide range of optics to meet all design needs. Device made of die-cast aluminum copper free EN AB 44100. Polyester painting QUALICOAT (Class 1), corrosion resistant to salt spray for 28 days, conforms to Standard IEC60092-306. Available in grey color RAL 7040, INOX brackets.

|                                      |                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------|
| <b>Code</b>                          | <b>6876-04-724</b>                                                                    |
| <b>Type</b>                          | Projecteur extérieur                                                                  |
| <b>Designer</b>                      | S.T. Fabas Luce                                                                       |
| <b>Code Barres</b>                   | 8019282103042                                                                         |
| <b>Tarif douanier</b>                | 94054239                                                                              |
| <b>Couleur</b>                       | aluminium anodisé brillant                                                            |
| <b>Matériel</b>                      | Monture en aluminium                                                                  |
| <b>IP</b>                            | IP66                                                                                  |
| <b>IK</b>                            | 08                                                                                    |
| <b>Classe d'isolation</b>            |  CL1 |
| <b>Operating ambient temperature</b> | -25°C +50°C                                                                           |
| <b>Ans de garantie</b>               | 5                                                                                     |
| <b>Made In</b>                       | Italy                                                                                 |
| <b>Dimensions de la lampe</b>        | 400x100x170,50mm - 2,60kg                                                             |
| <b>Dimensions de la boîte</b>        | 485x125x190mm - 2.9kg                                                                 |
|                                      | <b>Source de lumière 1</b>                                                            |
| <b>Source</b>                        | LED Intégré                                                                           |
| <b>Caractéristiques des LEDs</b>     | Power LED                                                                             |
| <b>Lumens de la source lumineuse</b> | 6700 lm                                                                               |
| <b>Lumen de l'article</b>            | 4860 lm                                                                               |
| <b>Température de couleur</b>        | Natural white 4000 K                                                                  |
| <b>Optique</b>                       | Elliptique Passage pour piétons                                                       |
| <b>CRI minimum</b>                   | >80                                                                                   |
| <b>Maintien du flux lumineux</b>     | 60.000h L70 B50                                                                       |
| <b>Classe énergétique</b>            |    |
|                                      | <b>Spécifications électriques 1</b>                                                   |
| <b>Tension d'alimentation</b>        | 100/240V AC 50/60Hz                                                                   |
| <b>Puissance totale absorbée</b>     | 54W                                                                                   |
| <b>Driver</b>                        | Inclus                                                                                |
| <b>Facteur de puissance</b>          | >0,9                                                                                  |
| <b>Système de contrôle</b>           | On/Off                                                                                |

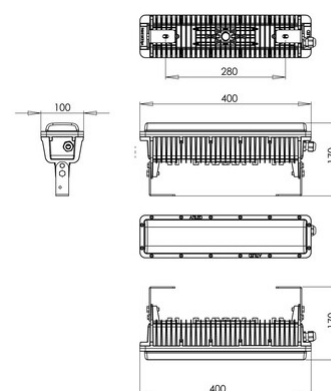

CE