





Skilos

Skilos recessed ceiling is a lighting fixture with a 600x600mm modular structure. Provided with an optical system which allows excellent visual comfort, the micropismatic screen guarantees a UGR<19 factor. Equipped with the latest generation of very high efficiency LEDs, 4000K natural light, CRI 90. The IP65 protection degree is guaranteed both on the visible side and on the recessed side. Particularly suitable for operating, aseptic, chemical and food premises. Possibility to have custom-made dimensions.

Code	6524-34-715
Type	Recessed lamp
Designer	S.T. Fabas Luce
Eancode	8019282552758
Customs tariff	94054239
Color	White
Material	Metal frame / Clear prismatic diffuser
IP	IP65
IK	04
Insulation Class	 CL1
Operating ambient temperature	-20°C +45°C
Years of warranty	5
Item Dimensions	600x600x103mm - 9.3kg
Packaging Dimensions	650x650x150mm - 10.6kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	SMD
Light Source Lumen	5861 lm
Item Lumen	4485 lm
Color Temperature	Natural white 4000 K
Optics	Prismatic
Minimum CRI	>90
UGR	<19
Energy Efficiency Class	 A+ C
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	35W
Driver	Included
Power Factor	> 0.9
Control System	DALI/Push/On-Off

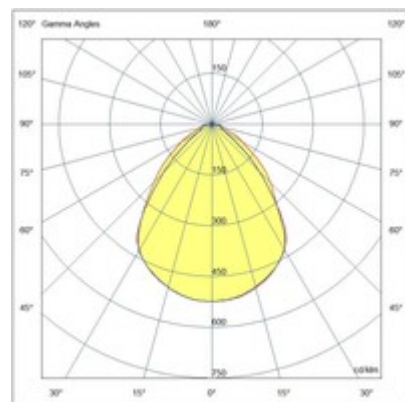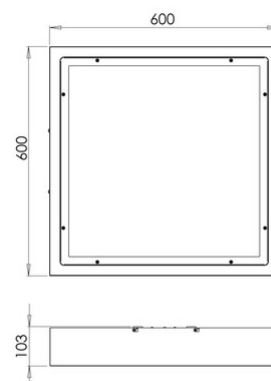

CE