





RUBENS 16W DALI

Adjustable floodlight with adapter for installation on a track, mains voltage for 16W LED source with high efficiency available in Warm or Natural White shades. Excellent color rendering with COB REAL COLOR CRI 97. Built-in electronic ballast in On/Off or DALI versions. The luminaire is made of die-cast aluminum and thermoplastic material, it allows a rotation of 350° around the vertical axis and an inclination of 90° with respect to the horizontal plane. Available in white or black in 15°, 28°, 41° optics.

Code	6973-92-556
Type	Track spotlight
Designer	S.T. Fabas Luce
Eancode	8019282527312
Customs tariff	94054239
Color	White
Material	Aluminum frame
IP	IP20
IK	04
Insulation Class	 CL2
Operating ambient temperature	-20°C + 35°C
Years of warranty	5
Made In	Italy
Item Dimensions	95mm Ø55mm - 0.38kg
Packaging Dimensions	200x165x70mm - 0.52kg
Light Source 1	
Light source	LED Built-in
LED Characteristics	COB
Light Source Lumen	1260 lm
Item Lumen	881 lm
Color Temperature	Warm white 3000K
Optics	41°
Typical CRI	97
Minimum CRI	90
Luminous Flux Maintenance	50.000h L80 B10
Energy Efficiency Class	
Electrical specifications 1	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	16W
Driver	Included
Power Factor	>0,9
Control System	DALI

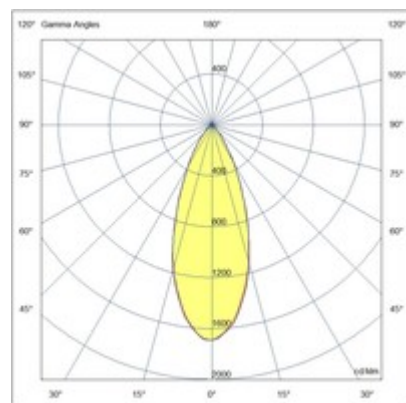

CE